HP Family Ball Sockets

High Pullout and Low Assembly Force Ball Sockets

PIBS HP (ASYST P/N 24842):

- Insertion Force: **90N (Max)**
- Pull-out Force: **300N (Min)**
- Allowable rotation of ASYST Standard Ball Stud in socket: **16-33° (direction dependant)**





SIBS HP (ASYST P/N 36185):

- Insertion Force: **125N (Max)**
- Pull-out Force: **440N (Min)**
- Allowable rotation of ASYST Standard Ball Stud in socket: **18° all directions**

K50HP (ASYST P/N 26538):

- Insertion Force: **200N (Max)**
- Pull-out Force: **440N (Min)**
- Allowable rotation of ASYST Standard Ball Stud in socket: **18° all directions**

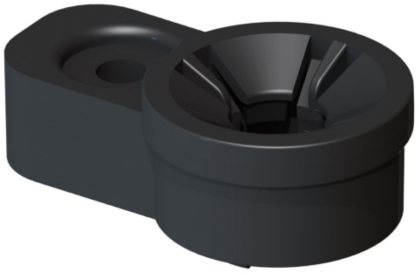

OPS-HP (ASYST P/N 15129):

- Insertion Force: **100N (Max)**
- Pull-out Force: **400N (Min)**
- Allowable rotation of ASYST Standard Ball Stud in socket: **18° all directions**

Contact for North America:

Mr. Jason Trotter
Director of Sales
phone: 1 847-909-9123
e-mail: jtrotter@asysttech.com

For more information please contact Torsten Fischer, phone +49 2751 529-530 , e-mail: torsten.fischer@ejot.com

09.17/PDF04.25 Subject to technical changes.

EJOT. Bringing it together.